



USER MANUAL  
**MECHANISM FOR FOLDWAY BED**  
Single • Double • Queen

ASSEMBLY STEPS

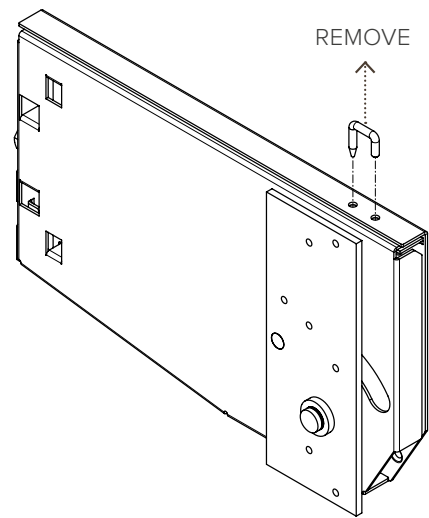

1.  
Unlock the mechanism.

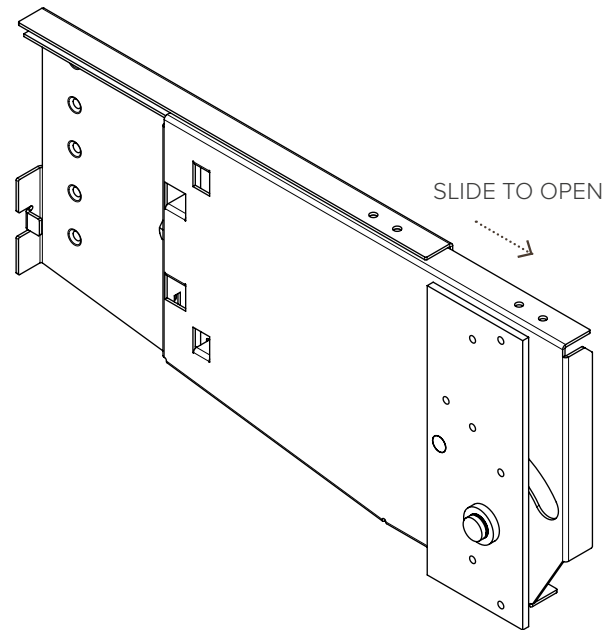

2.  
Open the mechanism.



SAFETY INFORMATION


- 1. Be careful: the cabinet must be always fixed to the wall before starting to mount the mechanism.
- 2. The screws to fix the mechanism to the furniture are not provided.  
The user is responsible to use the proper screws.
- 3. It is mandatory to use all the 14 screws showed above to fix the metal boxes.




WARRANTY

To make the mechanism work and to ensure the warranty of the product, cicled dimensions must be respected.


ASSEMBLY STEPS

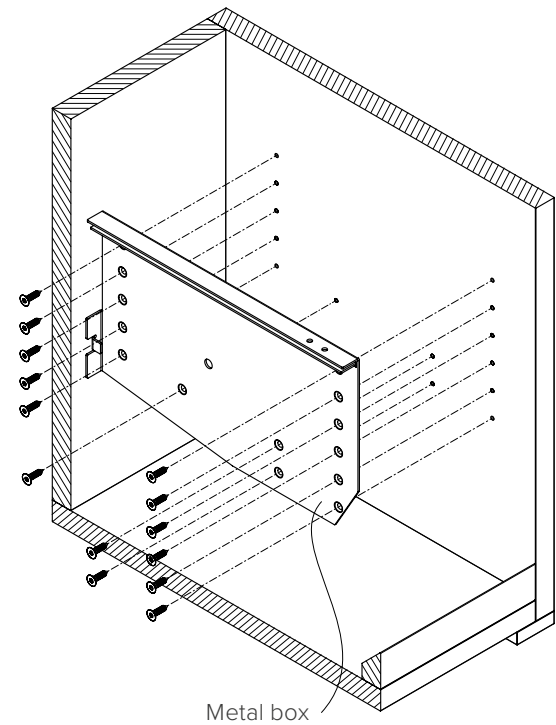


3.  
Mount the metal box on the cabinet.

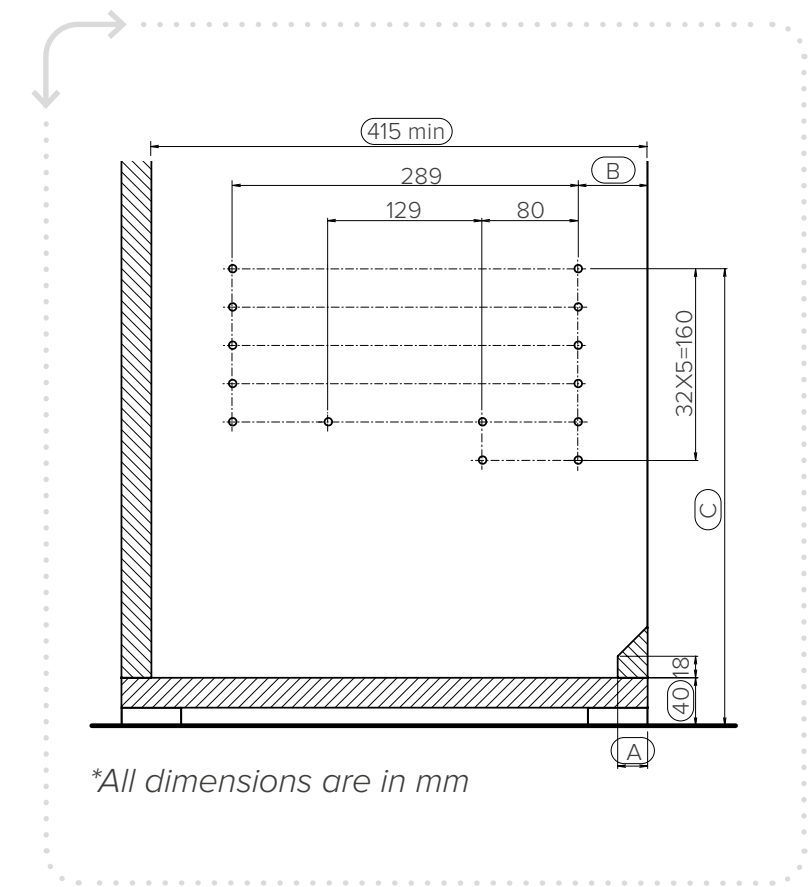


\*All dimensions are in mm

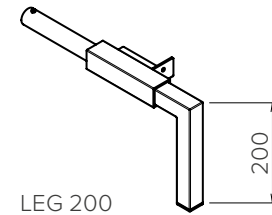

LEG 200

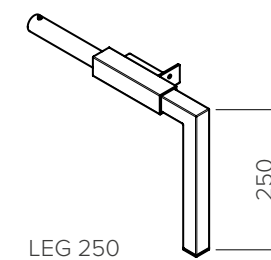

LEG 250




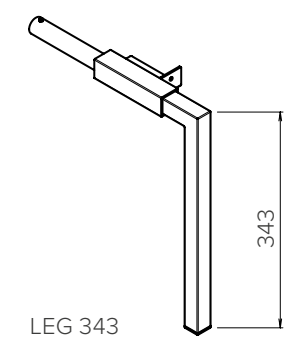


LEG 343

A	16	19	22	25	16	19	22	25	16	19	22	25
B	49	52	55	58	49	52	55	58	49	52	55	58
C	382	382	382	382	432	432	432	432	525	525	525	525

\*All dimensions are in mm

ASSEMBLY STEPS

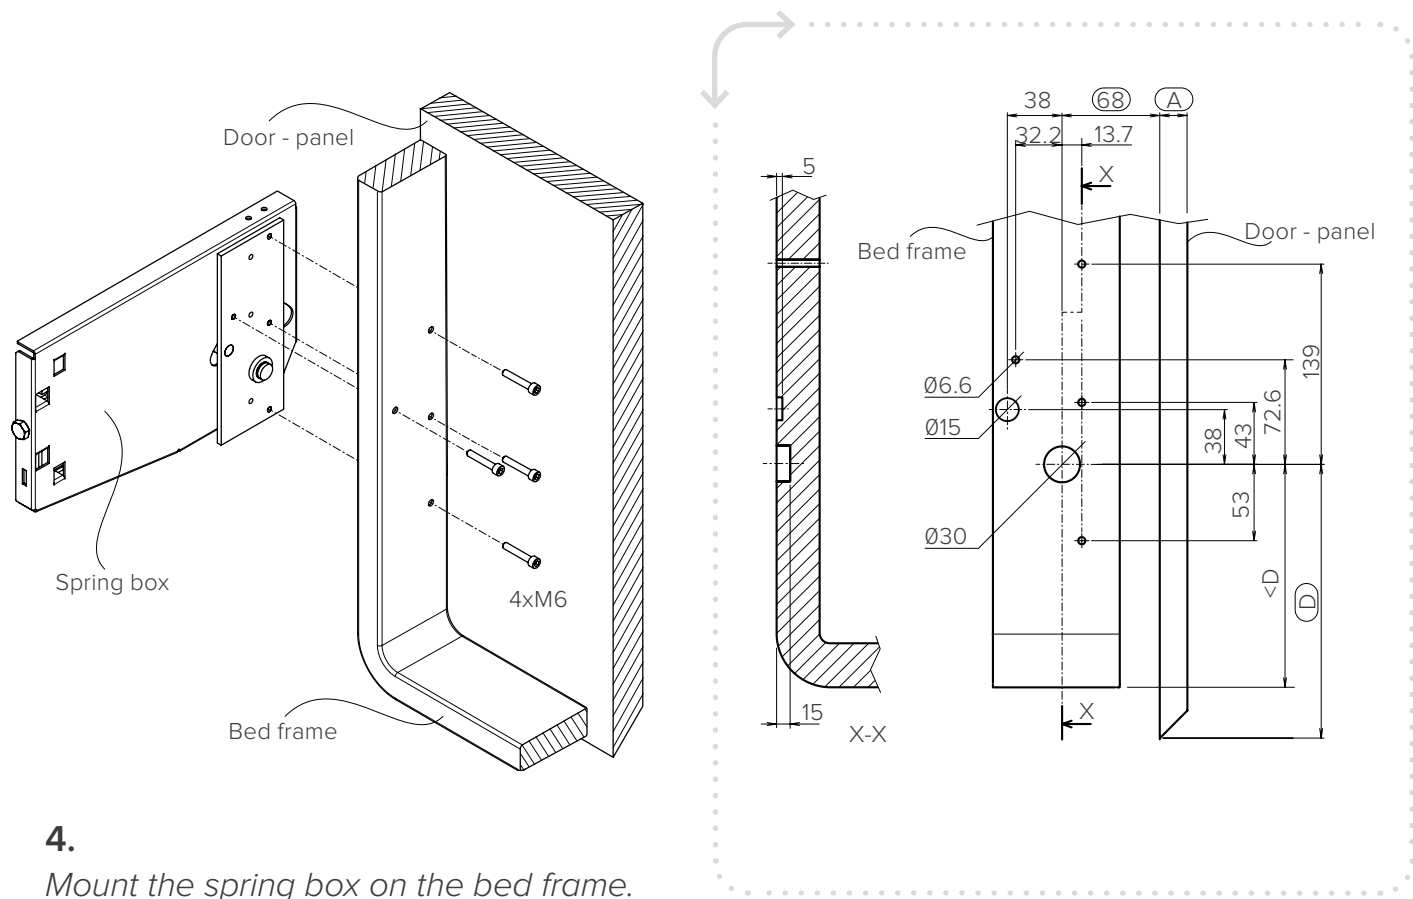


A	16	19	22	25	16	19	22	25	16	19	22	25
D	190	190	190	190	240	240	240	240	333	333	333	333

\*All dimensions are in mm


ASSEMBLY STEPS

**! WARRANTY**  
To make the mechanism work and to ensure the warranty of the product, cicled dimensions must be respected.

**! SAFETY INFORMATION**  
If door/panel thickness is less than 22mm, it is strongly recommended to use our plate to strengthen your wooden box.

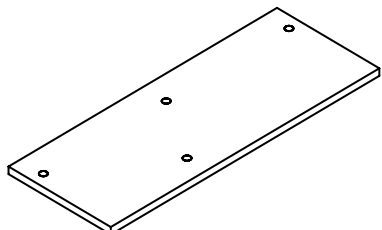


TO CALCULATE THE INTERNAL WIDTH OF THE CABINET

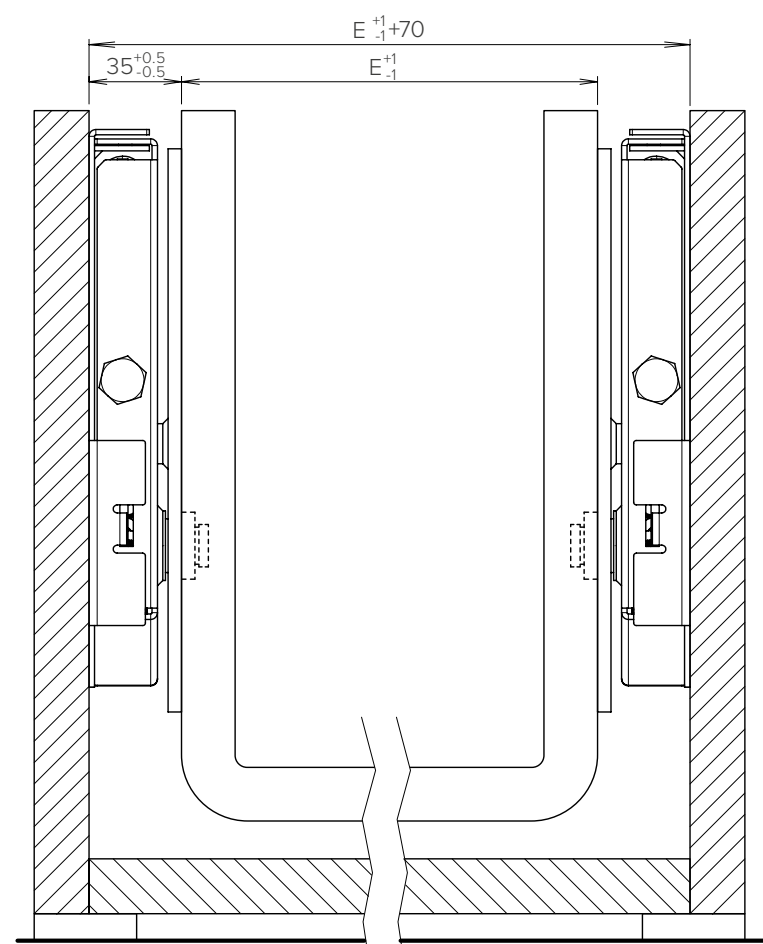


Reference dimensions to build the cabinet


ASSEMBLY STEPS

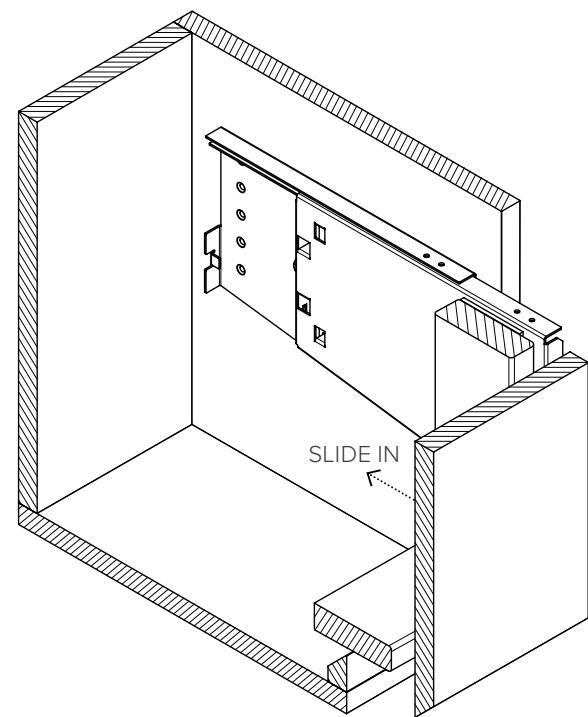


5.  
Slide spring box into metal box.

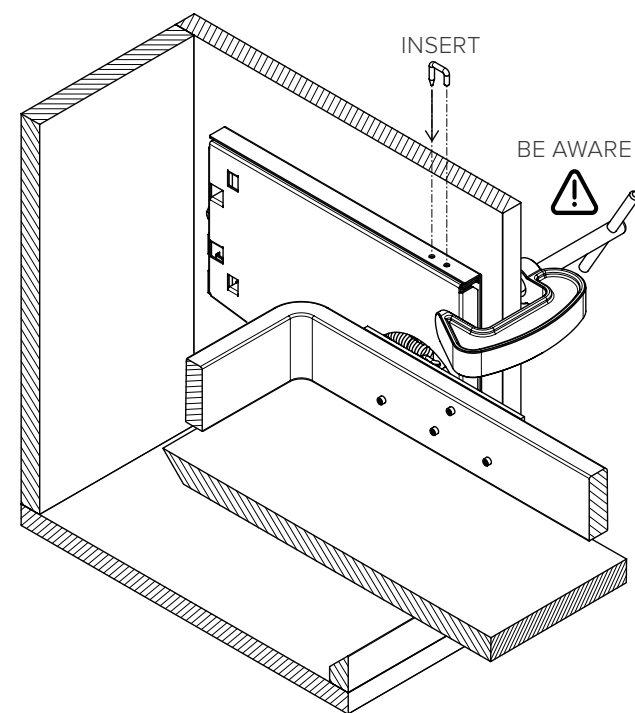

7.  
Lock the two parts of the box.

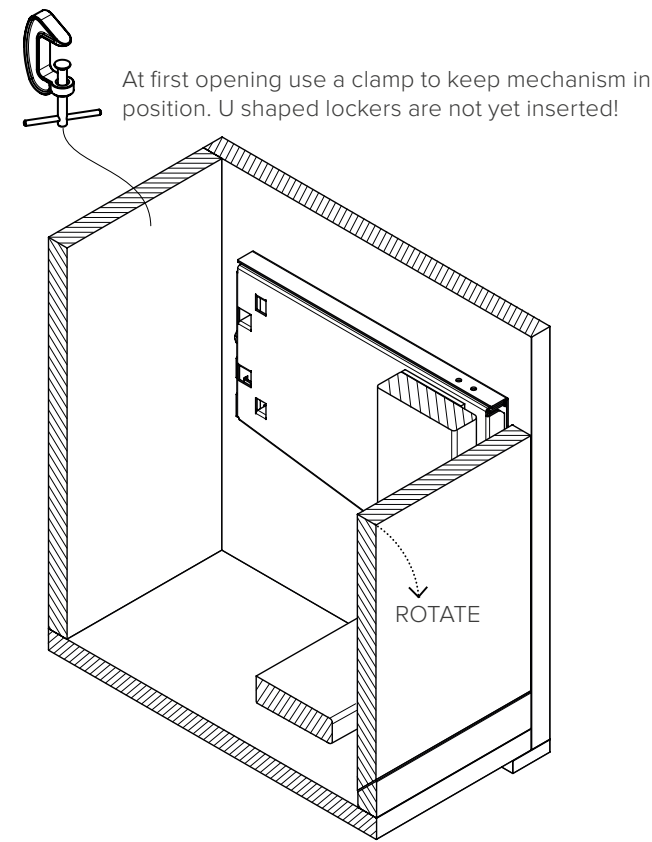

6.  
Rotate the mechanism in horizontal position.

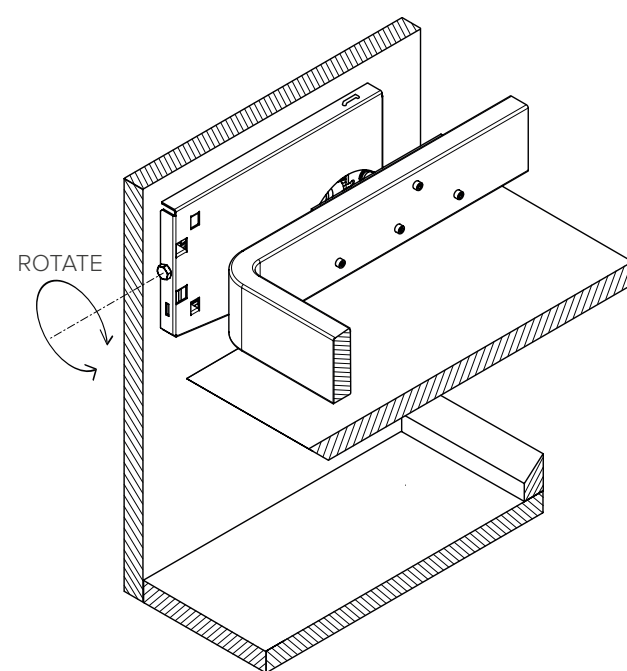

8.  
Rotate the bolt on the box's back to regulate the springs tension.

ASSEMBLY STEPS




**BE AWARE**  
Before having mounted the feet, the bed frame must not be rotated more than 90°.




**BE AWARE**  
1. Springs tension is correctly set when bed stops in each position the user leaves it.  
2. Springs of both left and right mechanisms should be evenly tensioned: apply the same turns on left and right bolts.  
3. Do not remove the screw completely.




**BE AWARE**  
Mechanism is certified to support a maximum of 105kg.  
With this weight the mechanism stops the bed door before it touches the ground if dropped from closed position.

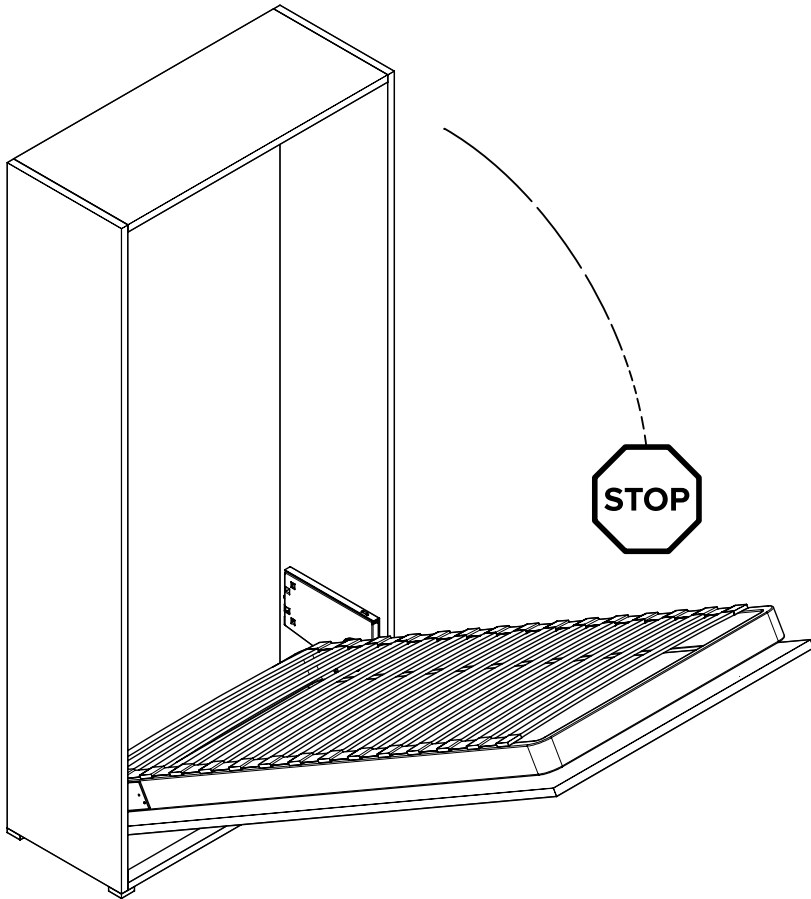


ASSEMBLY STEPS

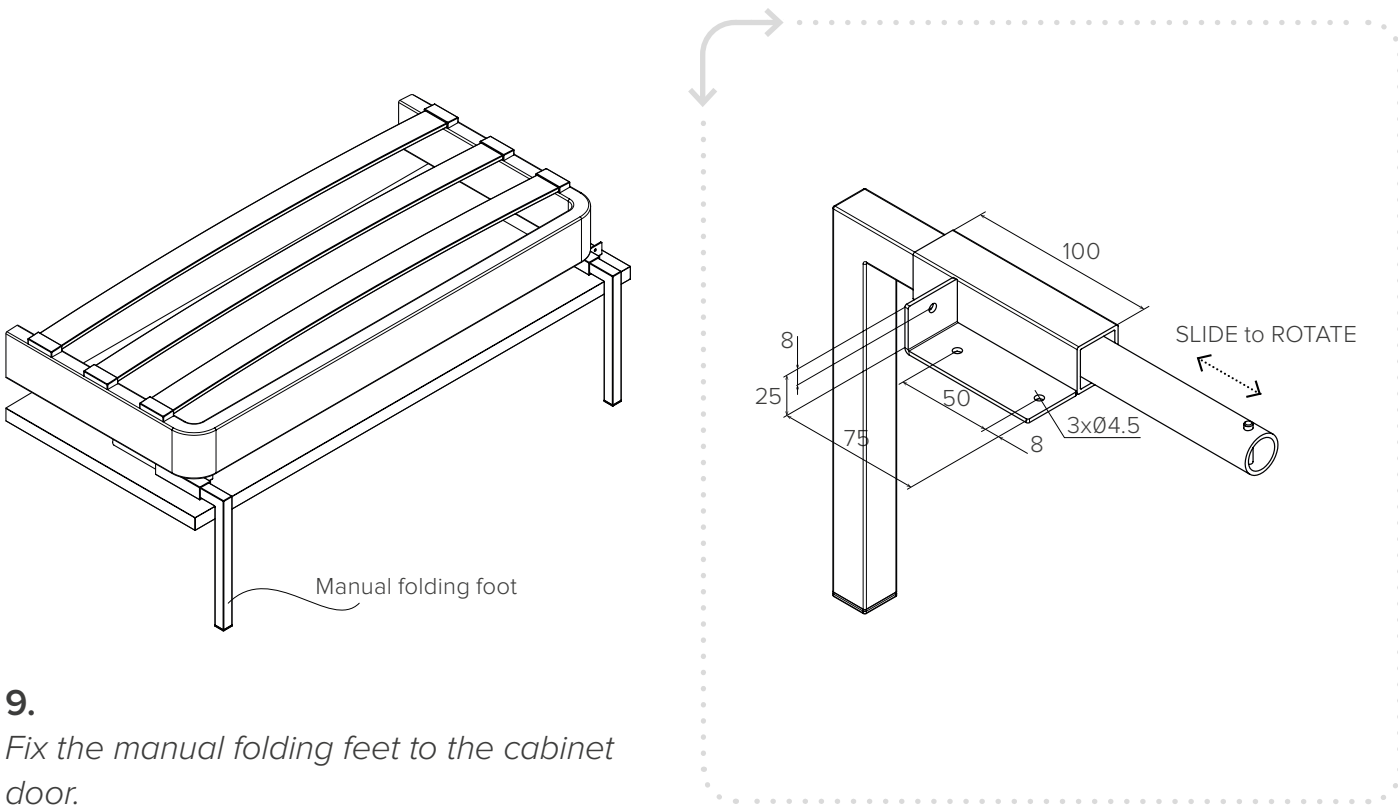

FEET TYPES

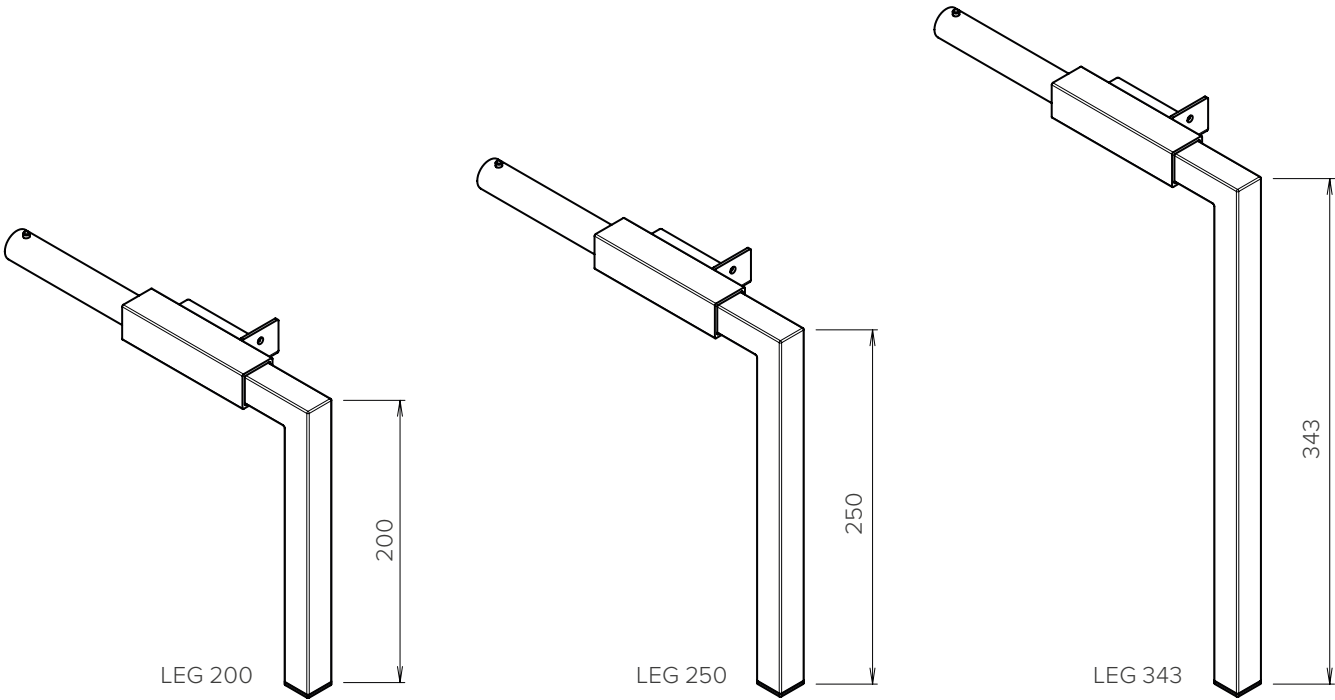

ASSEMBLY - FINAL RESULT

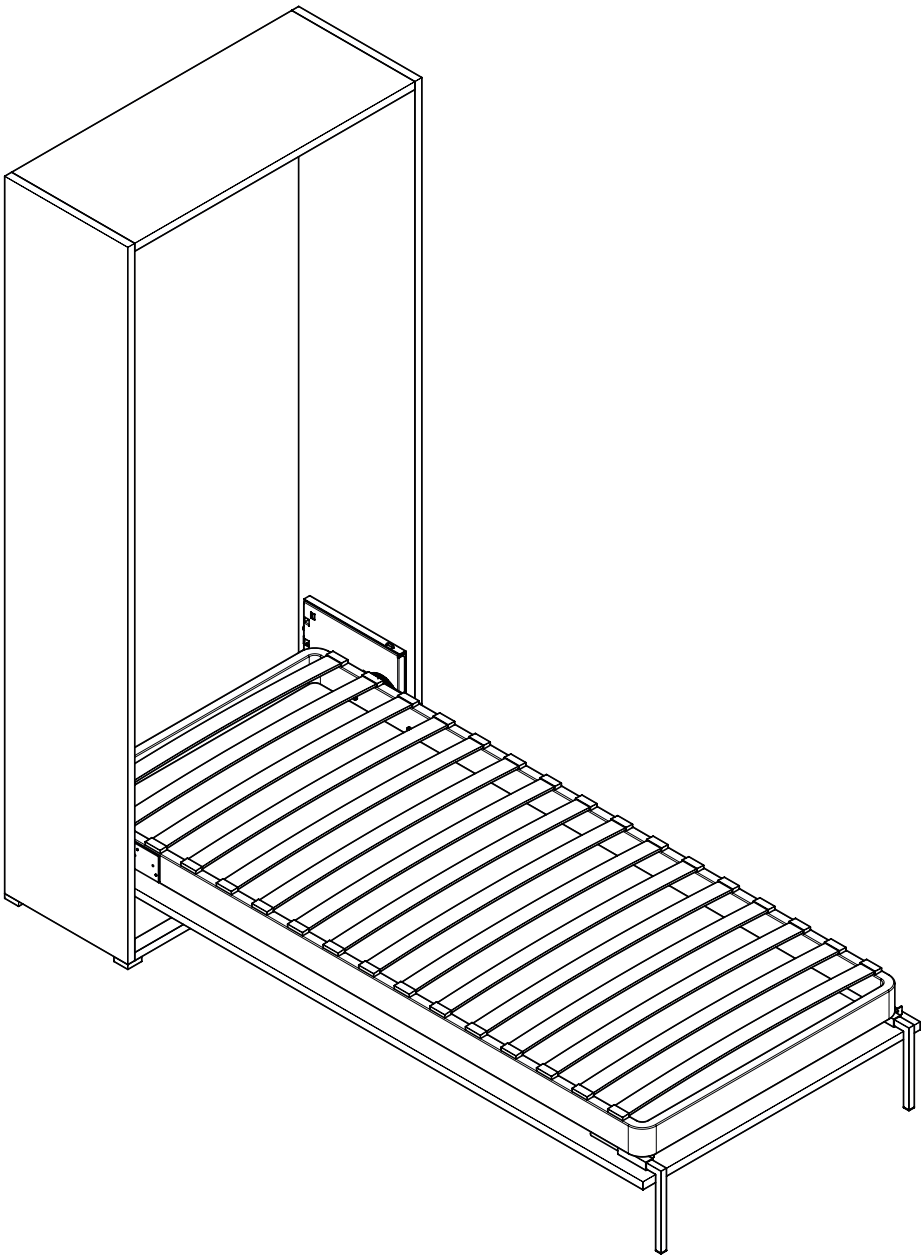


BE AWARE


It is possible to use the mechanism with different cabinet dimensions **ONLY IF YOU CHECK:**

- 1. the mechanism rotation;
- 2. the balance of the mechanism;
- 3. the perfect closing of the cabinet door.


DISASSEMBLY STEPS

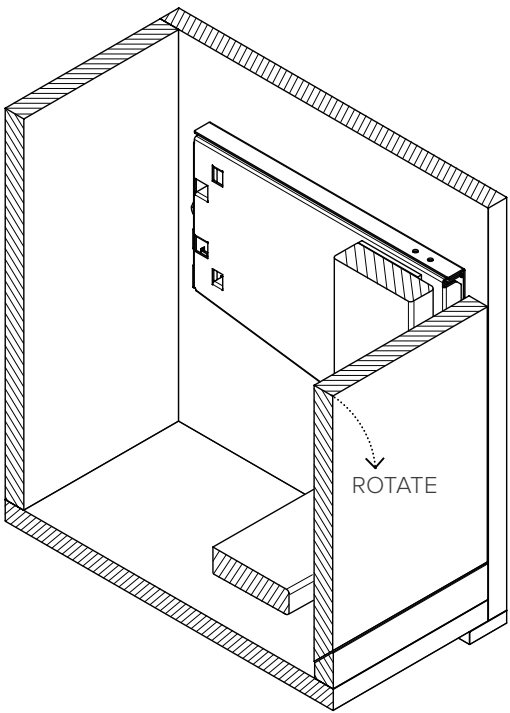

1.  
*Rotate the mechanism in horizontal position.*

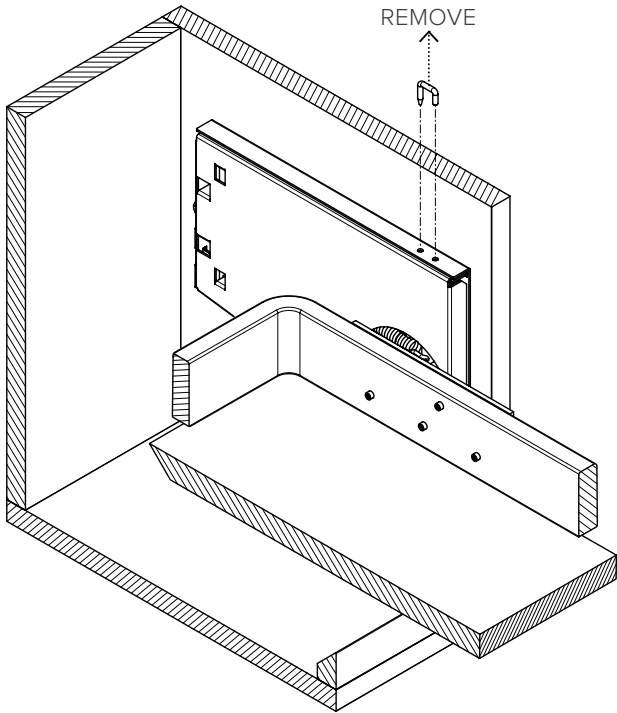

2.  
*Unock the two parts of the box.*

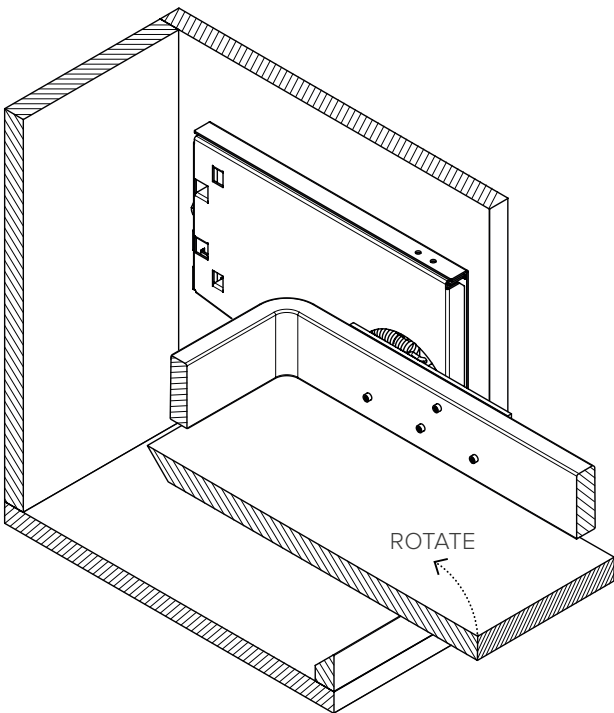


3.  
*Rotate the mechanism in vertical position.*




**SAFETY INFORMATION**

Two installers are needed to disassemble the product: while one person maintains the bed in horizontal position, the other one unlocks the mechanisms.

DISASSEMBLY STEPS

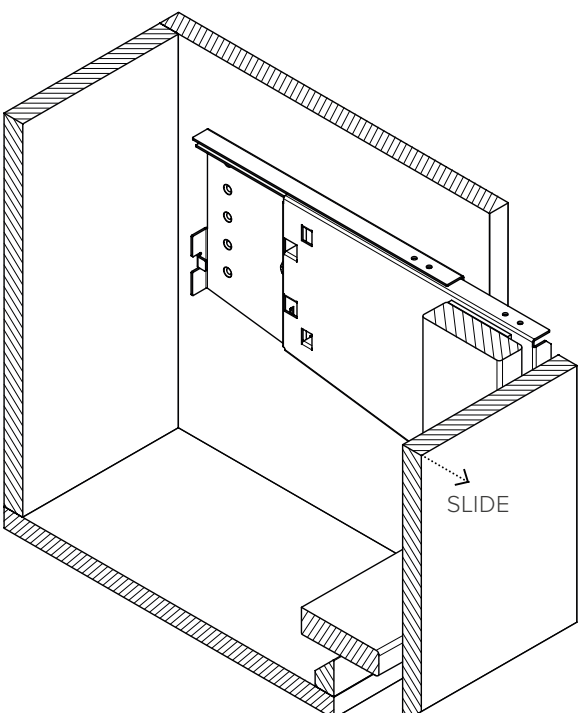

4.  
*Slide out spring boxes from metal boxes.*

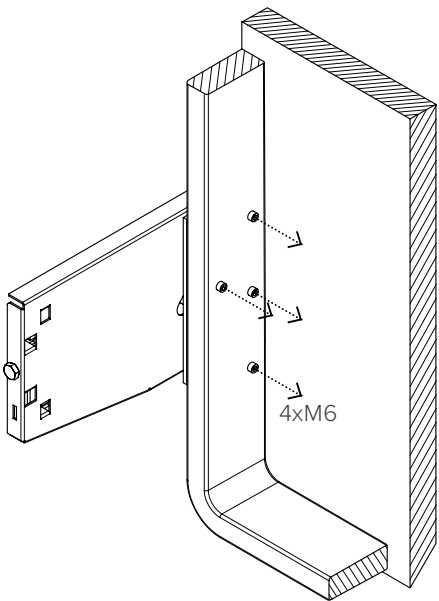

5.  
*Disassemble the spring boxes.*

